



SEA-DOG
MARINE

2026 SUPPLEMENT

EXPERIENCE THE SEA-DOG DIFFERENCE

Evolving with Purpose

At Sea-Dog, we've built our legacy on delivering high-quality, competitively priced products, while supporting the well-being of our employees, our partners, and the communities we serve.

Looking ahead, that legacy is evolving into a focused, forward-thinking strategy. With expanded in-house manufacturing, a growing portfolio of *Made in the USA* offerings, and a deeper commitment to full-system marine solutions, we are truly evolving with purpose.

This transformation is made possible

Introducing Sea-Dog Marine Wire™: Made in the USA

We are proud to announce the official launch of **Sea-Dog Marine Wire™**, a pivotal addition to our product portfolio and the cornerstone of our full-solution electrical systems initiative. Engineered for maximum durability, flexibility, and true marine capability and performance, this new line is designed to meet the highest standards of today's builders and marine professionals.

This is more than a new product, it's the start of a complete systems platform. Sea-Dog Marine Wire™ joins our growing electrical line, which includes Wire Accessories, Thermal Circuit Breakers, and Battery Switches. Together, they form the building blocks of a scalable, streamlined marine electrical system, delivering confidence from component to connection.

You'll also notice a refreshed look with the Sea-Dog packaging—designed to unify our

through the strong support of our parent company, Patrick Industries, and the leadership of our President, Jasper Nysether, who continue to empower our team with the resources, infrastructure, and operational scale to fully realize our vision.

This year's supplement reflects that direction. From marine hardware, cordage, and lighting to major new product launches, we continue to grow, innovate, and deliver dependable solutions—backed by the logistics and support you trust.

core and emerging categories with an elevated, retail-ready presence. It's another step forward in bringing the full-systems model to life—on the shelf and across the market.

We're also proud to introduce a bold new direction in hardware, beginning with the launch of our Dampening hinge family—now available in Black PVD finishes. PVD, or Physical Vapor Deposition, is a durable and environmentally friendly coating process that enhances both the appearance and performance of marine-grade components. This marks the first step in a growing platform of premium fit-and-finish upgrades designed to meet the elevated expectations of modern boatbuilders and consumers alike.

This supplement supports all the channels we serve—OEM, wholesale, and aftermarket alike—each playing a vital role in our continued growth.

We're proud to introduce what's next, while staying true to what's always defined Sea-Dog.



Sea-Dog does not sell to the general public – we only sell to boat builders and wholesalers. For information on how to purchase our products, visit the "Where to Buy" page on our website.



DARK
FINISH

PVD
TECHNOLOGY



Modern hardware built to perform,
styled to endure.

Sea-Dog's new matte black finish is a high-performance coating engineered to resist scratches, corrosion, and the harshest elements. Unlike traditional finishes that fade or chip over time, physical vapor disposition (PVD) bonds at the molecular level, ensuring lasting beauty and resilience.

Handrails • Folding Cleats • Dampening Hinges




Available in a
range of finishes
and sizes

— SEA-DOG.COM —

**DAMPENING BUTT HINGE - BLACK**

Stamped 304 Stainless Steel/PVD Coated

PATENT PENDING

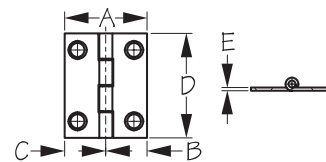

Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203070	203070-1	1-1/4"	5/8"	5/8"	1-1/2"	1/16"	Stainless	#8 FH	.03 / .06	10 ea / 10 pr
203071	203071-1	1-1/2"	3/4"	3/4"	2"	1/16"	Stainless	#8 FH	.06 / .12	10 ea / 10 pr
203072	203072-1	2"	1"	1"	2"	1/16"	Stainless	#8 FH	.07 / .14	10 ea / 10 pr
203077	203077-1	1-1/4"	5/8"	5/8"	1-1/2"	1/16"	Black	#8 FH	.03 / .06	10 ea / 10 pr
203078	203078-1	1-1/2"	3/4"	3/4"	2"	1/16"	Black	#8 FH	.06 / .12	10 ea / 10 pr
203079	203079-1	2"	1"	1"	2"	1/16"	Black	#8 FH	.07 / .14	10 ea / 10 pr


These Dampening Butt Hinges consist of two rectangular leaves with a Teflon coated pin that produces a very precise, low friction movement for a very high end feel with anti-rattle properties. Designed to attach to abutting surfaces of a door and door jamb or to be mortised for a flush installation. Constructed of corrosion resistant stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with four #8 FH fasteners (not included). Patent Pending.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**DAMPENING BUTT HINGE - BLACK**

Stamped 304 Stainless Steel/PVD Coated

PATENT PENDING



Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203080	203080-1	2"	1"	1"	3"	1/16"	Stainless	#8 FH	.11 / .22	10 ea / 10 pr
203081	203081-1	3"	1-1/2"	1-1/2"	3"	1/16"	Stainless	#8 FH	.16 / .32	10 ea / 10 pr
203088	203088-1	2"	1"	1"	3"	1/16"	Black	#8 FH	.11 / .22	10 ea / 10 pr
203089	203089-1	3"	1-1/2"	1-1/2"	3"	1/16"	Black	#8 FH	.16 / .32	10 ea / 10 pr


These Dampening Butt Hinges consist of two rectangular leaves with a Teflon coated pin that produces a very precise, low friction movement for a very high end feel with anti-rattle properties. Designed to attach to abutting surfaces of a door and door jamb or to be mortised for a flush installation. Constructed of corrosion resistant stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with six #8 FH fasteners (not included). Patent Pending.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**DAMPENING SHORT SIDE DOOR HINGE - BLACK**

Stamped 304 Stainless Steel/PVD Coated

PATENT PENDING

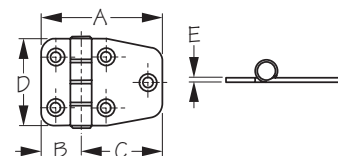

Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203510	203510-1	2-1/8"	11/16"	1-7/16"	1-1/2"	1/16"	Stainless	#8 FH	.09 / .18	10 ea / 10 pr
203511	203511-1	2-1/8"	11/16"	1-7/16"	1-1/2"	1/16"	Black	#8 FH	.09 / .18	10 ea / 10 pr


These Dampening Short Side Door Hinges consist of two leaves with a Teflon coated pin that produces a very precise, low friction movement for a very high end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion resistant stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with five #8 FH fasteners (not included). Patent Pending.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**DAMPENING OFFSET SHORT SIDE DOOR HINGE - BLACK**

Stamped 304 Stainless Steel/PVD Coated


PATENT PENDING

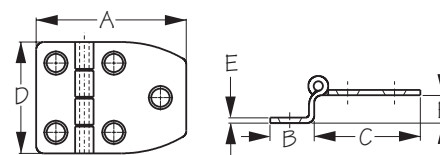

Bulk	Display	A	B	C	D	E	F	Finish	Fastener	Wt.(lb.)	Std. Pack
203512	203512-1	2-1/8"	5/8"	1-3/8"	1-1/2"	1/16"	3/8"	Stainless	#8 FH	.10 / .20	10 ea / 10 pr
203513	203513-1	2-1/8"	5/8"	1-3/8"	1-1/2"	1/16"	3/8"	Black	#8 FH	.10 / .20	10 ea / 10 pr

These Dampening Offset Short Side Door Hinges consist of two leaves with a Teflon coated pin that produces a very precise, low friction movement for a very high end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion resistant stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with five #8 FH fasteners (not included). Patent Pending.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

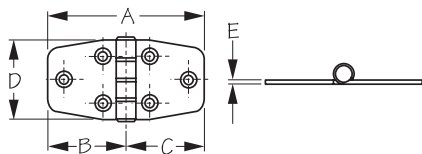**DAMPENING DOOR HINGE - BLACK**

Stamped 304 Stainless Steel/PVD Coated


PATENT PENDING



Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203530	203530-1	2-7/8"	1-7/16"	1-7/16"	1-1/2"	1/16"	Stainless	#8 FH	.11 / .22	10 ea / 10 pr
203539	203539-1	2-7/8"	1-7/16"	1-7/16"	1-1/2"	1/16"	Black	#8 FH	.11 / .22	10 ea / 10 pr

These Dampening Door Hinges consist of two leaves with a Teflon coated pin that produces a very precise, low friction movement for a very high end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion resistant stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with six #8 FH fasteners (not included). Patent Pending.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

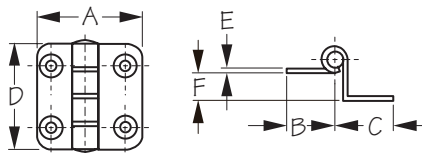**DAMPENING OFFSET BUTT HINGE - BLACK**

Stamped 304 Stainless Steel/PVD Coated


PATENT PENDING



Bulk	Display	A	B	C	D	E	F	Finish	Fastener	Wt.(lb.)	Std. Pack
203590	203590-1	1-1/2"	3/4"	3/4"	1-1/2"	1/16"	3/8"	Stainless	#8 FH	.09 / .18	10 ea / 10 pr
203599	203599-1	1-1/2"	3/4"	3/4"	1-1/2"	1/16"	3/8"	Black	#8 FH	.09 / .18	10 ea / 10 pr

These Dampening Offset Butt Hinges consist of two leaves with a Teflon coated pin that produces a very precise, low friction movement for a very high end feel with anti-rattle properties, designed to be mounted on the front surface of a raised door with a 3/8" offset on one side. Constructed of corrosion resistant stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with four #8 FH fasteners (not included). Patent Pending.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

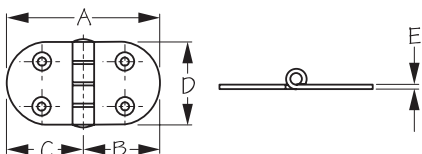**DAMPENING ROUND SIDE DOOR HINGE - SHORT - BLACK**

Stamped 304 Stainless Steel/PVD Coated


PATENT PENDING



Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203700	203700-1	2-13/16"	1-7/16"	1-7/16"	1-1/2"	1/16"	Stainless	#8 FH	.12 / .24	10 ea / 10 pr
203709	203709-1	2-13/16"	1-7/16"	1-7/16"	1-1/2"	1/16"	Black	#8 FH	.12 / .24	10 ea / 10 pr

These Dampening Short Round Side Door Hinges consist of two leaves with a Teflon coated pin that produces a very precise, low friction movement for a very high end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion resistant stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with four #8 FH fasteners (not included). Patent Pending.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

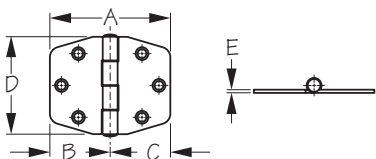**DAMPENING HEAVY DUTY HINGE - BLACK**

Stamped 304 Stainless Steel/PVD Coating

PATENT PENDING



Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203801	203801-1	2-7/8"	1-7/16"	1-7/16"	2-15/16"	1/16"	Stainless	#8 FH	.22 / .44	10 ea / 10 pr
203809	203809-1	2-7/8"	1-7/16"	1-7/16"	2-15/16"	1/16"	Black	#8 FH	.22 / .44	10 ea / 10 pr


These Dampening Heavy Duty Hinges consist of two leaves with a Teflon coated pin that produces a very precise, low friction movement for a very high end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion resistant stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with six #8 FH fasteners (not included). Patent Pending.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LED COMBINATION BOW LIGHT

Stamped 316 Stainless/Injection Molded ABS

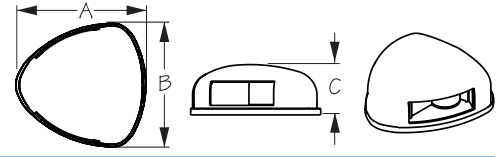

Bulk	Display	A	B	C	Volts	ABYC C-5/A-16	Finish	Fastener	Wt.(lb.)	Std. Pack
401080	401080-1	2-3/16"	2"	1"	12	Yes	Stainless	#8 RH	.13	1 ea
401081	401081-1	2-3/16"	2"	1"	12	Yes	Black	#8 RH	.13	1 ea

LED Combination Bow lights are constructed of Black ABS and available with a 316 Stainless cover. Installs with three #8 RH fasteners (not included). IP67 waterproof rating. 2 NM, ABYC C-5/A-16 Compliant. NMMA Type Accepted #2620316 with Stainless cover, Black version NMMA Type Accepted #2620317.


- Custom cover colors available with large orders

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LED TOP MOUNT SIDE LIGHT

Stamped 316 Stainless/Injection Molded ABS

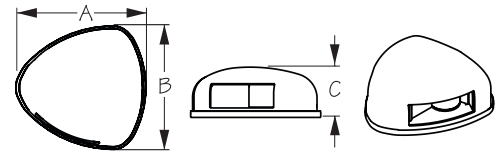

Bulk	Display	A	B	C	Volts	ABYC C-5/A-16	Finish	Fastener	Wt.(lb.)	Std. Pack
401087	401087-1	2-3/16"	2"	1"	12	Yes	Stainless	#8 RH	.24	1 pr
401088	401088-1	2-3/16"	2"	1"	12	Yes	Black	#8 RH	.24	1 pr

LED Top Mount Side lights are constructed of Black ABS and available with a 316 Stainless cover. Installs with two #8 RH fasteners (not included). IP67 waterproof rating. 2 NM, ABYC C-5/A-16 Compliant. NMMA Type Accepted #2620318 with Stainless cover, Black version NMMA Type Accepted #2620319.


- Custom cover colors available with large orders

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LED SIDE MOUNT SIDE LIGHT

Stamped 316 Stainless/Injection Molded ABS

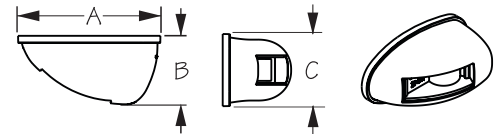

Bulk	Display	A	B	C	Volts	ABYC C-5/A-16	Finish	Fastener	Wt.(lb.)	Std. Pack
401091	401091-1	2-3/16"	1"	1"	12	Yes	Stainless	#8 RH	.17	1 pr
401092	401092-1	2-3/16"	1"	1"	12	Yes	Black	#8 RH	.17	1 pr

LED Side Mount Lights are constructed of Black ABS and available with a 316 Stainless cover. Installs with two #8 RH fasteners (not included). IP67 waterproof rating. 2 NM, ABYC C-5/A-16 Compliant. NMMA Type Accepted #2620320 Stainless cover, Black version NMMA Type Accepted #2620321.

- Custom cover colors available with large orders

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



How to Read Sea-Dog Part Numbers

Items with only a 6-digit part number are bulk.

Items available in retail display packaging are identified with a -1, -2, -3, -4, or -6 after the Sea-Dog part number.

No dash Bulk

- 1 Hanging card, bagged with header card, or in a clamshell
- 2 Medium retail pack
- 3 Color retail box
- 4 Large retail pack
- 6 Contractor pack



POWER YOUR ADVENTURE WITH SEA-DOG MARINE ELECTRICAL

Cable Management

Confidence in Every Connection

- Keep your system **safe, reliable & long-lasting**
- Components to meet ABYC E-11 Marine Standard systems
- Protects wiring from **chafing, vibration & damage**
- Everything you need: **heat shrink, ties, lugs, clamps, wrap & loom**

Sea-Dog Marine Wire™

Built to Endure the Harshest
Marine Environments

- Fights corrosion with **tinned stranded copper**
- **Ultra-flexible** for vibration-prone environments
- Rated for **600 volts** AC shore power systems and DC battery setups
- Withstands extreme temps: **-40°C to 105°C**
- **Saltwater, oil, acid & UV resistant** jacket
- Proudly **Made in the USA** & all ABYC compliant colors

Circuit Protection

Trust in Total Protection

- **Thermal circuit breakers** stop overloads before they stop you
- High-amp resettable options + **battery disconnect combo**
- Easy-to-see trip indicators
- Surface & panel mount choices
- **Ignition protected** to SAE standards
- **UL listed & Made in the USA** (select models)
- **IP66/IP67 rated** for rugged marine conditions



— SEA-DOG.COM —





SEA-DOG MARINE WIRE™ - PRIMARY

Tinned Copper Stranded Wire

25ft.
SPOOLS

Bulk	Display	Description	AWG	Color	Length in Feet.	Wt.(lb.)	Std. Pack
8006010	n/a	Primary Wire	6	Black	25	2	1 spool
8006020	n/a	Primary Wire	6	Red	25	2	1 spool
8008010	n/a	Primary Wire	8	Black	25	1.8	1 spool
8008020	n/a	Primary Wire	8	Red	25	1.8	1 spool
8010010	n/a	Primary Wire	10	Black	25	1.2	1 spool
8010020	n/a	Primary Wire	10	Red	25	1.2	1 spool
8012010	n/a	Primary Wire	12	Black	25	0.8	1 spool
8012020	n/a	Primary Wire	12	Red	25	0.8	1 spool
8012040	n/a	Primary Wire	12	Green	25	0.8	1 spool
8014010	n/a	Primary Wire	14	Black	25	0.36	1 spool
8014020	n/a	Primary Wire	14	Red	25	0.36	1 spool
8014030	n/a	Primary Wire	14	Yellow	25	0.36	1 spool
8014040	n/a	Primary Wire	14	Green	25	0.36	1 spool
8014050	n/a	Primary Wire	14	White	25	0.36	1 spool
8014060	n/a	Primary Wire	14	Blue	25	0.36	1 spool
8014080	n/a	Primary Wire	14	Orange	25	0.36	1 spool
8014100	n/a	Primary Wire	14	Purple	25	0.36	1 spool
8016010	n/a	Primary Wire	16	Black	25	0.32	1 spool
8016020	n/a	Primary Wire	16	Red	25	0.32	1 spool
8016030	n/a	Primary Wire	16	Yellow	25	0.32	1 spool
8016040	n/a	Primary Wire	16	Green	25	0.32	1 spool
8016050	n/a	Primary Wire	16	White	25	0.32	1 spool
8016060	n/a	Primary Wire	16	Blue	25	0.32	1 spool
8016070	n/a	Primary Wire	16	Brown	25	0.32	1 spool
8016080	n/a	Primary Wire	16	Orange	25	0.32	1 spool
8016090	n/a	Primary Wire	16	Pink	25	0.32	1 spool
8016100	n/a	Primary Wire	16	Purple	25	0.32	1 spool
8018010	n/a	Primary Wire	18	Black	25	0.3	1 spool
8018020	n/a	Primary Wire	18	Red	25	0.3	1 spool
8018040	n/a	Primary Wire	18	Green	25	0.3	1 spool
8018050	n/a	Primary Wire	18	White	25	0.3	1 spool
8018070	n/a	Primary Wire	18	Brown	25	0.3	1 spool
8018080	n/a	Primary Wire	18	Orange	25	0.3	1 spool
8018100	n/a	Primary Wire	18	Purple	25	0.3	1 spool
8006012	n/a	Primary Wire	6	Black	100	8	1 spool
8006022	n/a	Primary Wire	6	Red	100	8	1 spool
8006032	n/a	Primary Wire	6	Yellow	100	8	1 spool
8006042	n/a	Primary Wire	6	Green	100	8	1 spool
8006052	n/a	Primary Wire	6	White	100	8	1 spool
8008012	n/a	Primary Wire	8	Black	100	7.2	1 spool
8008022	n/a	Primary Wire	8	Red	100	7.2	1 spool
8008042	n/a	Primary Wire	8	Green	100	7.2	1 spool
8008052	n/a	Primary Wire	8	White	100	7.2	1 spool
8010012	n/a	Primary Wire	10	Black	100	4.4	1 spool
8010022	n/a	Primary Wire	10	Red	100	4.4	1 spool
8010032	n/a	Primary Wire	10	Yellow	100	4.4	1 spool
8010042	n/a	Primary Wire	10	Green	100	4.4	1 spool
8010052	n/a	Primary Wire	10	White	100	4.4	1 spool
8010062	n/a	Primary Wire	10	Blue	100	4.4	1 spool
8010082	n/a	Primary Wire	10	Orange	100	4.4	1 spool
8012012	n/a	Primary Wire	12	Black	100	2.8	1 spool
8012022	n/a	Primary Wire	12	Red	100	2.8	1 spool
8012032	n/a	Primary Wire	12	Yellow	100	2.8	1 spool
8012042	n/a	Primary Wire	12	Green	100	2.8	1 spool
8012052	n/a	Primary Wire	12	White	100	2.8	1 spool
8012062	n/a	Primary Wire	12	Blue	100	2.8	1 spool
8012072	n/a	Primary Wire	12	Brown	100	2.8	1 spool
8012082	n/a	Primary Wire	12	Orange	100	2.8	1 spool
8012102	n/a	Primary Wire	12	Purple	100	2.8	1 spool
8014012	n/a	Primary Wire	14	Black	100	2.08	1 spool
8014022	n/a	Primary Wire	14	Red	100	2.08	1 spool

100ft.
SPOOLS

SEA-DOG MARINE WIRE™ - PRIMARY CONTINUED

Bulk	Display	Description	AWG	Color	Length in Feet.	Wt.(lb.)	Std. Pack
8014032	n/a	Primary Wire	14	Yellow	100	2.08	1 spool
8014042	n/a	Primary Wire	14	Green	100	2.08	1 spool
8014052	n/a	Primary Wire	14	White	100	2.08	1 spool
8014062	n/a	Primary Wire	14	Blue	100	2.08	1 spool
8014072	n/a	Primary Wire	14	Brown	100	2.08	1 spool
8014082	n/a	Primary Wire	14	Orange	100	2.08	1 spool
8014092	n/a	Primary Wire	14	Pink	100	2.08	1 spool
8014102	n/a	Primary Wire	14	Purple	100	2.08	1 spool
8014112	n/a	Primary Wire	14	Gray	100	2.08	1 spool
8014132	n/a	Primary Wire	14	Light Blue	100	2.08	1 spool
8016012	n/a	Primary Wire	16	Black	100	1.28	1 spool
8016022	n/a	Primary Wire	16	Red	100	1.28	1 spool
8016032	n/a	Primary Wire	16	Yellow	100	1.28	1 spool
8016042	n/a	Primary Wire	16	Green	100	1.28	1 spool
8016052	n/a	Primary Wire	16	White	100	1.28	1 spool
8016062	n/a	Primary Wire	16	Blue	100	1.28	1 spool
8016072	n/a	Primary Wire	16	Brown	100	1.28	1 spool
8016082	n/a	Primary Wire	16	Orange	100	1.28	1 spool
8016092	n/a	Primary Wire	16	Pink	100	1.28	1 spool
8016102	n/a	Primary Wire	16	Purple	100	1.28	1 spool
8016112	n/a	Primary Wire	16	Gray	100	1.28	1 spool
8016132	n/a	Primary Wire	16	Light Blue	100	1.28	1 spool
8018012	n/a	Primary Wire	18	Black	100	1.2	1 spool
8018022	n/a	Primary Wire	18	Red	100	1.2	1 spool
8018032	n/a	Primary Wire	18	Yellow	100	1.2	1 spool
8018042	n/a	Primary Wire	18	Green	100	1.2	1 spool
8018052	n/a	Primary Wire	18	White	100	1.2	1 spool
8018062	n/a	Primary Wire	18	Blue	100	1.2	1 spool
8018072	n/a	Primary Wire	18	Brown	100	1.2	1 spool
8018082	n/a	Primary Wire	18	Orange	100	1.2	1 spool
8018092	n/a	Primary Wire	18	Pink	100	1.2	1 spool
8018102	n/a	Primary Wire	18	Purple	100	1.2	1 spool
8018112	n/a	Primary Wire	18	Gray	100	1.2	1 spool
8006014	n/a	Primary Wire	6	Black	250	12	1 spool
8006024	n/a	Primary Wire	6	Red	250	12	1 spool
8006044	n/a	Primary Wire	6	Green	250	12	1 spool
8008014	n/a	Primary Wire	8	Black	250	18	1 spool
8008024	n/a	Primary Wire	8	Red	250	18	1 spool
8008044	n/a	Primary Wire	8	Green	250	18	1 spool
8010014	n/a	Primary Wire	10	Black	250	11.9	1 spool
8010024	n/a	Primary Wire	10	Red	250	11.9	1 spool
8010034	n/a	Primary Wire	10	Yellow	250	11.9	1 spool
8012014	n/a	Primary Wire	12	Black	250	7	1 spool
8012024	n/a	Primary Wire	12	Red	250	7	1 spool
8012044	n/a	Primary Wire	12	Green	250	7	1 spool
8012054	n/a	Primary Wire	12	White	250	7	1 spool
8012074	n/a	Primary Wire	12	Brown	250	7	1 spool
8014014	n/a	Primary Wire	14	Black	250	4.88	1 spool
8014024	n/a	Primary Wire	14	Red	250	4.88	1 spool
8014034	n/a	Primary Wire	14	Yellow	250	4.88	1 spool
8014044	n/a	Primary Wire	14	Green	250	4.88	1 spool
8014054	n/a	Primary Wire	14	White	250	4.88	1 spool
8014064	n/a	Primary Wire	14	Blue	250	4.88	1 spool
8014074	n/a	Primary Wire	14	Brown	250	4.86	1 spool
8014084	n/a	Primary Wire	14	Orange	250	4.86	1 spool
8014104	n/a	Primary Wire	14	Purple	250	4.86	1 spool
8014114	n/a	Primary Wire	14	Gray	250	4.86	1 spool
8014134	n/a	Primary Wire	14	Light Blue	250	4.88	1 spool
8016014	n/a	Primary Wire	16	Black	250	3.2	1 spool
8016024	n/a	Primary Wire	16	Red	250	3.2	1 spool
8016034	n/a	Primary Wire	16	Yellow	250	3.2	1 spool
8016044	n/a	Primary Wire	16	Green	250	3.2	1 spool
8016054	n/a	Primary Wire	16	White	250	3.2	1 spool



100ft.
SPOOLS

250ft.
SPOOLS



250ft.
SPOOLS

400ft.
SPOOLS

500ft.
SPOOLS

SEA-DOG MARINE WIRE™ - PRIMARY CONTINUED

Bulk	Display	Description	AWG	Color	Length in Feet.	Wt.(lb.)	Std. Pack
8016064	n/a	Primary Wire	16	Blue	250	3.2	1 spool
8016074	n/a	Primary Wire	16	Brown	250	3.2	1 spool
8016084	n/a	Primary Wire	16	Orange	250	3.2	1 spool
8016104	n/a	Primary Wire	16	Purple	250	3.2	1 spool
8016114	n/a	Primary Wire	16	Gray	250	3.2	1 spool
8018014	n/a	Primary Wire	18	Black	250	3	1 spool
8018034	n/a	Primary Wire	18	Yellow	250	3	1 spool
8018064	n/a	Primary Wire	18	Blue	250	3	1 spool
8018074	n/a	Primary Wire	18	Brown	250	3	1 spool
8012016	n/a	Primary Wire	12	Black	400	12.5	1 spool
8012026	n/a	Primary Wire	12	Red	400	12.5	1 spool
8012056	n/a	Primary Wire	12	White	400	12.5	1 spool
8008017	n/a	Primary Wire	8	Black	500	36	1 spool
8008027	n/a	Primary Wire	8	Red	500	36	1 spool
8010027	n/a	Primary Wire	10	Red	500	23.9	1 spool
8010047	n/a	Primary Wire	10	Green	500	23.9	1 spool
8014017	n/a	Primary Wire	14	Black	500	9.76	1 spool
8014027	n/a	Primary Wire	14	Red	500	9.76	1 spool
8014037	n/a	Primary Wire	14	Yellow	500	9.76	1 spool
8014067	n/a	Primary Wire	14	Blue	500	9.76	1 spool
8014117	n/a	Primary Wire	14	Gray	500	9.76	1 spool
8014137	n/a	Primary Wire	14	Light Blue	500	9.76	1 spool
8016117	n/a	Primary Wire	16	Gray	500	6.4	1 spool

Sea-Dog Marine Wire™ is offered in all gauges and colors for primary marine wire applications. All 18 AWG - 6 AWG wire is designed and manufactured for marine use with tinned copper wire for corrosion resistance and improved conductivity. The copper is annealed and finely stranded to offer flexibility and resistance to vibration to ensure reliable performance over time. Primary wire is available in all colors in accordance with ABYC standard. 600V 105°C DRY (75°C WET) and oil resistant. UL Listed Boat Cable. Made in the U.S.A.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



25ft.
SPOOLS

50ft.
SPOOLS

SEA-DOG MARINE WIRE™ - BATTERY CABLE

Tinned Copper Stranded Wire



Bulk	Display	Description	AWG	Color	Length in Feet.	Wt.(lb.)	Std. Pack
8041010	n/a	Battery Cable	4/0	Black	25	7.13	1 spool
8021010	n/a	Battery Cable	2/0	Black	25	6.13	1 spool
8021020	n/a	Battery Cable	2/0	Red	25	6.13	1 spool
8021030	n/a	Battery Cable	2/0	Yellow	25	6.13	1 spool
8011010	n/a	Battery Cable	1/0	Black	25	5.13	1 spool
8011020	n/a	Battery Cable	1/0	Red	25	5.13	1 spool
8002010	n/a	Battery Cable	2	Black	25	3.17	1 spool
8002020	n/a	Battery Cable	2	Red	25	3.17	1 spool
8004010	n/a	Battery Cable	4	Black	25	4.13	1 spool
8004020	n/a	Battery Cable	4	Red	25	4.13	1 spool
8041011	n/a	Battery Cable	4/0	Black	50	11.25	1 spool
8041021	n/a	Battery Cable	4/0	Red	50	11.25	1 spool
8041030	n/a	Battery Cable	4/0	Yellow	50	11.25	1 spool
8021011	n/a	Battery Cable	2/0	Black	50	10.25	1 spool
8021021	n/a	Battery Cable	2/0	Red	50	10.25	1 spool
8021031	n/a	Battery Cable	2/0	Yellow	50	10.25	1 spool
8011011	n/a	Battery Cable	1/0	Black	50	9.25	1 spool
8011021	n/a	Battery Cable	1/0	Red	50	9.25	1 spool
8011031	n/a	Battery Cable	1/0	Yellow	50	9.25	1 spool
8001011	n/a	Battery Cable	1	Black	50	16.34	1 spool
8001021	n/a	Battery Cable	1	Red	50	16.34	1 spool
8001031	n/a	Battery Cable	1	Yellow	50	16.34	1 spool
8002011	n/a	Battery Cable	2	Black	50	6.33	1 spool
8002021	n/a	Battery Cable	2	Red	50	6.33	1 spool
8002031	n/a	Battery Cable	2	Yellow	50	6.33	1 spool
8004011	n/a	Battery Cable	4	Black	50	8.25	1 spool
8004021	n/a	Battery Cable	4	Red	50	8.25	1 spool
8004031	n/a	Battery Cable	4	Yellow	50	8.25	1 spool

SEA-DOG MARINE WIRE™ - BATTERY CABLE CONTINUED

Bulk	Display	Description	AWG	Color	Length in Feet.	Wt.(lb.)	Std. Pack
8041012	n/a	Battery Cable	4/0	Black	100	19.50	1 spool
8041022	n/a	Battery Cable	4/0	Red	100	19.50	1 spool
8021012	n/a	Battery Cable	2/0	Black	100	18.50	1 spool
8021022	n/a	Battery Cable	2/0	Red	100	18.50	1 spool
8021032	n/a	Battery Cable	2/0	Yellow	100	18.50	1 spool
8011012	n/a	Battery Cable	1/0	Black	100	17.50	1 spool
8011022	n/a	Battery Cable	1/0	Red	100	17.50	1 spool
8011032	n/a	Battery Cable	1/0	Yellow	100	17.50	1 spool
8001012	n/a	Battery Cable	1	Black	100	32.68	1 spool
8001022	n/a	Battery Cable	1	Red	100	32.68	1 spool
8002012	n/a	Battery Cable	2	Black	100	12.66	1 spool
8002022	n/a	Battery Cable	2	Red	100	12.66	1 spool
8002032	n/a	Battery Cable	2	Yellow	100	12.66	1 spool
8004012	n/a	Battery Cable	4	Black	100	16.50	1 spool
8004022	n/a	Battery Cable	4	Red	100	16.50	1 spool
8004032	n/a	Battery Cable	4	Yellow	100	16.50	1 spool
8021013	n/a	Battery Cable	2/0	Black	200	37.00	1 spool
8021023	n/a	Battery Cable	2/0	Red	200	37.00	1 spool
8011014	n/a	Battery Cable	1/0	Black	250	42.50	1 spool
8011024	n/a	Battery Cable	1/0	Red	250	42.50	1 spool
8002014	n/a	Battery Cable	2	Black	250	31.65	1 spool
8002024	n/a	Battery Cable	2	Red	250	31.65	1 spool
8004024	n/a	Battery Cable	4	Red	250	41.25	1 spool



100ft.
SPOOLS

200ft.
SPOOLS

250ft.
SPOOLS

Sea-Dog Marine Wire™ is offered in larger gauges for battery cable installations. All 4 AWG- 4/0 AWG cables are designed and manufactured for marine use with tinned copper wire for corrosion resistance and improved conductivity. The copper is annealed and finely stranded to offer flexibility and resistance to vibration to ensure reliable performance over time. Battery Cable is available in all colors in accordance with ABYC standard. 600V 105°C DRY (75°C WET) and oil resistant. UL Listed Boat Cable. Made in the U.S.A.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SEA-DOG MARINE WIRE™ - DUPLEX - FLAT WIRE

Tinned Copper Stranded Wire



Bulk	Display	Description	AWG	Color	Length in Feet.	Wt.(lb.)	Std. Pack
8010220	n/a	Duplex - Flat - Safety Wire	10	Red/Yellow	25	.50	1 spool
8008201	n/a	Duplex - Flat Wire	8	Red/Black	50	1.25	1 spool
8006202	n/a	Duplex - Flat Wire	6	Red/Black	100	3.32	1 spool
8008202	n/a	Duplex - Flat Wire	8	Red/Black	100	2.50	1 spool
8010202	n/a	Duplex - Flat Wire	10	Red/Black	100	2.00	1 spool
8012202	n/a	Duplex - Flat Wire	12	Red/Black	100	2.32	1 spool
8014202	n/a	Duplex - Flat Wire	14	Red/Black	100	2.25	1 spool
8016202	n/a	Duplex - Flat Wire	16	Red/Black	100	2.00	1 spool
8008222	n/a	Duplex - Flat - Safety Wire	8	Red/Yellow	100	2.50	1 spool
8010222	n/a	Duplex - Flat - Safety Wire	10	Red/Yellow	100	2.00	1 spool
8012222	n/a	Duplex - Flat - Safety Wire	12	Red/Yellow	100	2.32	1 spool
8014222	n/a	Duplex - Flat - Safety Wire	14	Red/Yellow	100	2.25	1 spool
8016222	n/a	Duplex - Flat - Safety Wire	16	Red/Yellow	100	2.00	1 spool
8012204	n/a	Duplex - Flat Wire	12	Red/Black	250	6.00	1 spool
8014204	n/a	Duplex - Flat Wire	14	Red/Black	250	5.00	1 spool
8016204	n/a	Duplex - Flat Wire	16	Red/Black	250	5.00	1 spool
8010224	n/a	Duplex - Flat - Safety Wire	10	Red/Yellow	250	4.50	1 spool
8014224	n/a	Duplex - Flat - Safety Wire	14	Red/Yellow	250	5.00	1 spool
8016224	n/a	Duplex - Flat - Safety Wire	16	Red/Yellow	250	5.00	1 spool
8014209	n/a	Duplex - Flat Wire	14	Red/Black	1000	22.50	1 spool
8016209	n/a	Duplex - Flat Wire	16	Red/Black	1000	20.00	1 spool
8014229	n/a	Duplex - Flat - Safety Wire	14	Red/Yellow	1000	22.50	1 spool
8016229	n/a	Duplex - Flat - Safety Wire	16	Red/Yellow	1000	20.00	1 spool

25/50ft.
SPOOLS

100ft.
SPOOLS

250ft.
SPOOLS

1000ft.
SPOOLS

Sea-Dog Marine Wire™ is offered in 16/2- 6/2 gauges for duplex boat cable installations. All duplex cable is sheathed in PVC and is flat in construction. It is designed and manufactured for marine use with tinned copper wire for corrosion resistance and improved conductivity. The copper is annealed and finely stranded to offer flexibility and resistance to vibration to ensure reliable performance over time. Duplex Cable is available in all colors in accordance with ABYC standard. 600V 105°C DRY (75°C WET) and oil resistant. UL Listed Boat Cable. Made in the U.S.A.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SEA-DOG MARINE WIRE™ - TRIPLEX - FLAT WIRE

Tinned Copper Stranded Wire



50ft.

100ft.
SPOOLS250ft.
SPOOLS

500ft.


Bulk	Display	Description	AWG	Color	Length in Feet.	Wt.(lb.)	Std. Pack
8006301	n/a	Triplex - Flat Wire	6	White/Green/Black	50	9.25	1 spool
8006302	n/a	Triplex - Flat Wire	6	White/Green/Black	100	18.50	1 spool
8008302	n/a	Triplex - Flat Wire	8	White/Green/Black	100	18.00	1 spool
8010302	n/a	Triplex - Flat Wire	10	White/Green/Black	100	16.50	1 spool
8012302	n/a	Triplex - Flat Wire	12	White/Green/Black	100	11.50	1 spool
8014302	n/a	Triplex - Flat Wire	14	White/Green/Black	100	8.55	1 spool
8016302	n/a	Triplex - Flat Wire	16	White/Green/Black	100	8.00	1 spool
8012304	n/a	Triplex - Flat Wire	12	White/Green/Black	250	28.75	1 spool
8014304	n/a	Triplex - Flat Wire	14	White/Green/Black	250	21.38	1 spool
8016304	n/a	Triplex - Flat Wire	16	White/Green/Black	250	20.00	1 spool
8014307	n/a	Triplex - Flat Wire	14	White/Green/Black	500	42.76	1 spool

Sea-Dog Marine Wire™ is offered in 16/3- 6/3 gauges for triplex boat cable installations. All Triplex wire is sheathed in flexible PVC and is flat in construction. It is designed and manufactured for marine use with tinned copper wire for corrosion resistance and improved conductivity. The copper is annealed and finely stranded to offer flexibility and resistance to vibration to ensure reliable performance over time. Triplex Cable is available in all colors in accordance with ABYC standard. 600V 105°C DRY (75°C WET) and oil resistant. UL Listed Boat Cable. Made in the U.S.A.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HEAT SHRINK BUTT CONNECTOR

Tin Plated Copper/Injection Molded Nylon




Bulk	Display	AWG	Color	Qty. Per Bag	Listed	Wt.(lb.)	Std. Pack
429110H	429110H-1	22-18	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
n/a	429110H-2	22-18	Red	25	UL/CSA	.25	10 sets
429130H	429130H-1	16-14	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
n/a	429130H-2	16-14	Blue	25	UL/CSA	.25	10 sets
429150H	429150H-1	12-10	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
n/a	429150H-2	12-10	Yellow	25	UL/CSA	.25	10 sets

Heat Shrink Butt Connectors are designed to transfer electrical current. Most commonly used to connect or splice two wires together to lengthen, change, or repair an electrical circuit. Frequently used during product installation to eliminate soldering the wire joint. Pliable when crimping, the insulation also offers superior heat and deformation resistance. Transparent insulation allows for easy inspection of wire connections. These connectors benefit from the addition of heat shrink insulation, protecting against moisture and vibration, preventing corrosion and accidental wire pull-out, and significantly increasing the longevity and dependability of the connection. Industry standard color-coding indicates wire size range. Constructed of injection molded nylon insulation and tin-plated copper solid barrel for maximum conductivity and holding strength. Terminals comply with ABYC standard E-11.

HEAT SHRINK RING TERMINAL

Tin Plated Copper/Injection Molded Nylon

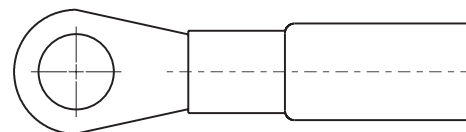


Bulk	Display	AWG	Ring	Color	Qty. Per Bag	Listed	Wt.(lb.)	Std. Pack
429212H	429212H-1	22-18	#4-6	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429213H	429213H-1	22-18	#8	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429214H	429214H-1	22-18	#10	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429216H	429216H-1	22-18	1/4"	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429217H	429217H-1	22-18	5/16"	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429218H	429218H-1	22-18	3/8"	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429232H	429232H-1	16-14	#4-6	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429233H	429233H-1	16-14	#8	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429234H	429234H-1	16-14	#10	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429236H	429236H-1	16-14	1/4"	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429237H	429237H-1	16-14	5/16"	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429238H	429238H-1	16-14	3/8"	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429252H	429252H-1	12-10	#4-6	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429253H	429253H-1	12-10	#8	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429254H	429254H-1	12-10	#10	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429256H	429256H-1	12-10	1/4"	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets

HEAT SHRINK RING TERMINAL CONTINUED

Bulk	Display	AWG	Ring	Color	Qty. Per Bag	Listed	Wt.(lb.)	Std. Pack
429257H	429257H-1	12-10	5/16"	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429258H	429258H-1	12-10	3/8"	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets

Heat Shrink Ring Terminals are designed to transfer electrical current. Ring terminals connect two or more wires to a single connection point. These connectors can be crimped anywhere and are frequently used during electronic installations to eliminate soldering the wire joint. Pliable when crimping, the insulation also offers superior heat and deformation resistance. Transparent insulation allows for easy inspection of wire connection. These connectors benefit from the addition of heat shrink insulation, protecting against moisture and vibration, preventing corrosion and accidental wire pull-out, and significantly increasing the longevity and dependability of the connection. Industry standard color-coding indicates wire size range. Constructed of injection molded nylon insulation and tin-plated copper barrel and ring for maximum conductivity and holding strength. Terminals comply with ABYC standard E-11.

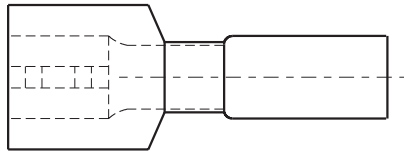


HEAT SHRINK INSULATED PUSH-ON TERMINAL

Tin Plated Copper/Injection Molded Nylon

Bulk	Display	Size	AWG	Male/Female	Color	Qty. Per Bag	Listed	Wt.(lb.)	Std. Pack
429311H	429311H-1	.250"	22-18	Male	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429315H	429315H-1	.250"	22-18	Female	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429331H	429331H-1	.250"	16-14	Male	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429335H	429335H-1	.250"	16-14	Female	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429351H	429351H-1	.250"	12-10	Male	Yellow	100/4	UL/CSA	1.00 / .04	5 bag / 10 sets
429355H	429355H-1	.250"	12-10	Female	Yellow	100/4	UL/CSA	1.00 / .04	5 bag / 10 sets

Heat Shrink Insulated Push-On Terminals are designed to transfer electrical current. Push-On terminals create a quick connect termination for situations where the connection may need to be broken with frequency. These connectors can be crimped anywhere and are frequently used during electronic installations to eliminate soldering the wire joint. Pliable when crimping, the insulation also offers superior heat and deformation resistance. Transparent insulation allows for easy inspection of wire connection. These connectors benefit from the addition of heat shrink insulation, protecting against moisture and vibration, preventing corrosion and accidental wire pull-out, and significantly increasing the longevity and dependability of the connection. Industry standard color-coding indicates wire size range. Constructed of injection molded nylon insulation and tin-plated copper barrel for maximum conductivity and holding strength. Terminals comply with ABYC standard E-11.

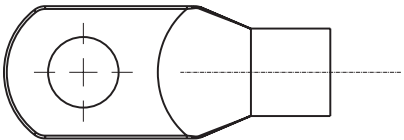

TERMINAL LUGS

Tinned Copper



Bulk	Display	Wire AWG	Mounting Hole Size	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	429460-1	8	#10	2	.02	10 pr
n/a	429460-2	8	#10	25	.50	10 sets
n/a	429461-1	8	1/4"	2	.04	10 pr
n/a	429461-2	8	1/4"	25	1.00	10 sets
n/a	429462-1	8	5/16"	2	.05	10 pr
n/a	429462-2	8	5/16"	25	1.25	10 sets
n/a	429463-1	8	3/8"	2	.06	10 pr
n/a	429463-2	8	3/8"	25	1.50	10 sets
n/a	429464-1	8	1/2"	2	.07	10 pr
n/a	429465-1	6	1/4"	2	.08	10 pr
n/a	429465-2	6	1/4"	25	2.00	10 sets
n/a	429466-1	6	5/16"	2	.09	10 pr
n/a	429466-2	6	5/16"	25	2.25	10 sets
n/a	429467-1	6	3/8"	2	.10	10 pr
n/a	429467-2	6	3/8"	25	2.50	10 sets
n/a	429468-1	6	1/2"	2	.11	10 pr
n/a	429470-1	4	5/16"	2	.13	10 pr
n/a	429470-2	4	5/16"	25	3.25	10 sets
n/a	429471-1	4	3/8"	2	.14	10 pr
n/a	429471-2	4	3/8"	25	3.50	10 sets
n/a	429472-1	4	1/2"	2	.15	10 pr
n/a	429473-1	2	1/4"	2	.16	10 pr
n/a	429473-2	2	1/4"	25	4.00	10 sets
n/a	429474-1	2	5/16"	2	.17	10 pr



TERMINAL LUGS CONTINUED

Bulk	Display	Wire AWG	Mounting Hole Size	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	429474-2	2	5/16"	25	4.25	10 sets
n/a	429475-1	2	3/8"	2	.18	10 pr
n/a	429475-2	2	3/8"	25	4.50	10 sets
n/a	429476-1	2	1/2"	2	.19	10 pr
n/a	429477-1	1	1/4"	2	.20	10 pr
n/a	429477-2	1	1/4"	25	5.00	10 sets
n/a	429478-1	1	5/16"	2	.21	10 pr
n/a	429478-2	1	5/16"	25	5.25	10 sets
n/a	429479-1	1	3/8"	2	.22	10 pr
n/a	429479-2	1	3/8"	25	5.50	10 sets
n/a	429480-1	1	1/2"	2	.23	10 pr
n/a	429481-1	1/0	1/4"	2	.24	10 pr
n/a	429482-1	1/0	5/16"	2	.25	10 pr
n/a	429483-1	1/0	3/8"	2	.26	10 pr
n/a	429484-1	1/0	1/2"	2	.27	10 pr
n/a	429485-1	2/0	1/4"	2	.28	10 pr
n/a	429486-1	2/0	5/16"	2	.29	10 pr
n/a	429487-1	2/0	3/8"	2	.30	10 pr
n/a	429488-1	2/0	1/2"	2	.31	10 pr
n/a	429489-1	3/0	1/4"	2	.32	10 pr
n/a	429490-1	3/0	5/16"	2	.33	10 pr
n/a	429491-1	3/0	3/8"	2	.34	10 pr
n/a	429492-1	3/0	1/2"	2	.35	10 pr
n/a	429493-1	4/0	1/4"	2	.36	10 pr
n/a	429494-1	4/0	5/16"	2	.37	10 pr
n/a	429495-1	4/0	3/8"	2	.38	10 pr
n/a	429496-1	4/0	1/2"	2	.39	10 pr
n/a	429526-1	8	5/16" (90°)	10	1.25	10 pr
n/a	429155-1	8	Butt Connectors	10	1.00	10 sets


Manufactured from 100% heavy-duty annealed tinned copper, providing for maximum current flow while resisting corrosion from salt and moisture. Seamless barrel design allows for maximum strength when crimped. Closed end seals out moisture so cables stay dry and corrosion free.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



UL CABLE TIE - STANDARD

Injection Molded Nylon

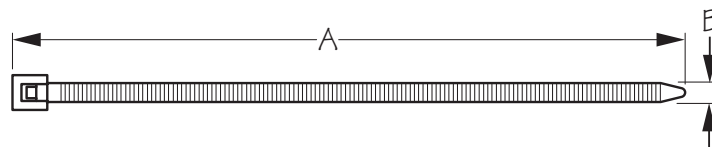

Bulk	Display	A	B	Color	B.S. (lb.)	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	427104-1	4"	7/64"	White	18	10	.01	5 bags
n/a	427104-2	4"	7/64"	White	18	25	.02	5 bags
n/a	427104-4	4"	7/64"	White	18	100	.05	5 bags
n/a	427105-1	5-5/8"	7/64"	White	40	10	.02	5 bags
n/a	427105-2	5-5/8"	7/64"	White	40	25	.04	5 bags
n/a	427105-4	5-5/8"	7/64"	White	40	100	.18	5 bags
n/a	427108-1	8"	9/64"	White	40	10	.02	5 bags
n/a	427108-2	8"	9/64"	White	40	25	.06	5 bags
n/a	427108-4	8"	9/64"	White	40	100	.25	5 bags
n/a	427110-1	10-1/2"	3/16"	White	50	10	.04	5 bags
n/a	427110-2	10-1/2"	3/16"	White	50	25	.10	5 bags
n/a	427110-4	10-1/2"	3/16"	White	50	100	.40	5 bags
n/a	427115-1	14-1/2"	19/64"	White	120	10	.12	5 bags
n/a	427115-2	14-1/2"	19/64"	White	120	25	.29	5 bags
n/a	427115-4	14-1/2"	19/64"	White	120	100	1.17	5 bags
427204	427204-1	4"	7/64"	Black	18	100/10	.07 / .01	5 bags
n/a	427204-2	4"	7/64"	Black	18	25	.02	5 bags
n/a	427204-4	4"	7/64"	Black	18	100	.07	5 bags
427205	427205-1	5-5/8"	7/64"	Black	40	100/10	.18 / .02	5 bags
n/a	427205-2	5-5/8"	7/64"	Black	40	25	.04	5 bags
n/a	427205-4	5-5/8"	7/64"	Black	40	100	.18	5 bags
427209	427209-1	7-7/8"	9/64"	Black	50	100/10	.34 / .03	5 bags

UL CABLE TIE - STANDARD CONTINUED

Bulk	Display	A	B	Color	B.S. (lb.)	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	427209-2	7-7/8"	9/64"	Black	50	25	.08	5 bags
n/a	427209-4	7-7/8"	9/64"	Black	50	100	.34	5 bags
427210	427210-1	11-3/4"	3/16"	Black	50	100/10	.41/.04	5 bags
n/a	427210-2	11-3/4"	3/16"	Black	50	25	.10	5 bags
n/a	427210-4	11-3/4"	3/16"	Black	50	100	.41	5 bags
427215	427215-1	14-1/2"	19/64"	Black	120	100/10	1.17 / .12	5 bags
n/a	427215-2	14-1/2"	19/64"	Black	120	25	.29	5 bags
n/a	427215-4	14-1/2"	19/64"	Black	120	100	1.17	5 bags

Standard UL Cable Ties are used to bundle and organize cable and wire runs, as well as to simplify installation and maintenance. Temperature Rating: -40°F to 185°F. Flammability Rating: UL 94 V-2. Constructed of UV stabilized injection molded nylon for continuous or extended exposure to the outdoor environment. Available in Black or White.



UL CABLE TIE - MIXED KIT

Injection Molded Nylon

Bulk	Display	Description	Wt.(lb.)	Std. Pack
n/a	427290-1	Cable Tie - Mixed Kit (Black)	.24	5 ea

The Cable Tie Mixed Kit includes 25 each of black UL cable ties in 4", 5-5/8", 8-1/2", and 10-1/2" sizes. Temperature Rating: -40°F to 185°F. Flammability Rating: UL 94 V-2. Constructed of UV stabilized injection molded nylon for continuous or extended exposure to the outdoor environment.



SPIRAL CABLE WRAP

Polyethylene

Bulk	Display	Diameter	Length	Color	Wt.(lb.)	Std. Pack
n/a	427501-1	1/4"	10'	Black	.13	10 bags
n/a	427501-2	1/4"	100'	Black	1.30	10 bags
n/a	427503-1	3/8"	10'	Black	.15	10 bags
n/a	427503-2	3/8"	100'	Black	1.50	10 bags
n/a	427505-1	1/2"	10'	Black	.17	10 bags
n/a	427505-2	1/2"	100'	Black	1.70	10 bags
n/a	427507-1	3/4"	10'	Black	.33	10 bags
n/a	427507-2	3/4"	100'	Black	3.30	10 bags
n/a	427509-1	1"	10'	Black	.45	10 bags
n/a	427509-2	1"	50'	Black	4.50	10 bags

Spiral Cable Wrap offers secure, flexible bundling of wire and cable. Ideal for permanent and custom installations. The abrasion resistant wrap allows wires to flex while staying protected, especially in installations where movement may occur. Constructed of Polyethylene. Designed for use in ABYC compliant systems.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SPLIT LOOM

Nylon

Bulk	Display	Diameter	Length	Color	Wt.(lb.)	Std. Pack
n/a	427521-1	3/8"	10'	Black	.15	10 bags
n/a	427521-2	3/8"	100'	Black	1.50	10 bags
n/a	427523-1	1/2"	10'	Black	.30	10 bags
n/a	427523-2	1/2"	100'	Black	3.00	10 bags
n/a	427525-1	3/4"	10'	Black	.45	10 bags
n/a	427525-2	3/4"	100'	Black	4.50	10 bags
n/a	427527-1	1"	10'	Black	.70	10 bags
n/a	427527-2	1"	100'	Black	7.00	10 bags

Split Loom helps protect and organize wiring by shielding cables from abrasion, heat, moisture, and chemicals. Ideal for quick installations by adding or removing wires without disconnecting the entire bundle. Designed for use in ABYC compliant systems to prevent accidental contact between wires, minimizing the risk of short circuits. Constructed of UL 94V-2 fire retardant Nylon.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov




Don't see what
you need?

Contact
customer service
sales@sea-dog.com



CUSHIONED CABLE CLAMPS

316 Stamped Stainless/Rubber

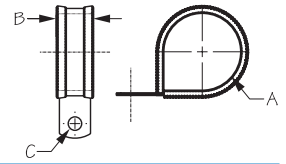

Bulk	Display	A	B	C (Fastener)	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	428004-1	3/8"	3/4"	1/4" RH	10	.15	10 bags
n/a	428005-1	1/2"	3/4"	1/4" RH	10	.20	10 bags
n/a	428008-1	3/4"	3/4"	1/4" RH	10	.25	10 bags
n/a	428010-1	1"	3/4"	1/4" RH	10	.40	10 bags
n/a	428011-1	1-1/4"	3/4"	1/4" RH	10	.40	10 bags
n/a	428012-1	1-1/2"	3/4"	1/4" RH	10	.50	10 bags
n/a	428013-1	1-3/4"	3/4"	1/4" RH	10	.60	10 bags
n/a	428015-1	2-1/2"	3/4"	1/4" RH	10	.70	10 bags


Stainless steel cushion clamps offer durability and secure cable management. Designed to resist temperature, water, fuel and acid, they are intended for use in ABYC marine compliant systems. Constructed of 316 stainless steel for corrosion resistance.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CABLE CLAMPS

Injection Molded Nylon



Bulk	Display	Color	A	B	C	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	428032-1	White	3/16"	3/8"	3/16"	10	.01	5 bags
n/a	428032-2	White	3/16"	3/8"	3/16"	25	.03	5 bags
n/a	428032-4	White	3/16"	3/8"	3/16"	100	.12	5 bags
n/a	428033-1	White	1/4"	3/8"	3/16"	10	.01	5 bags
n/a	428033-2	White	1/4"	3/8"	3/16"	25	.03	5 bags
n/a	428033-4	White	1/4"	3/8"	3/16"	100	.12	5 bags
n/a	428034-1	White	5/16"	3/8"	3/16"	10	.01	5 bags
n/a	428034-2	White	5/16"	3/8"	3/16"	25	.04	5 bags
n/a	428034-4	White	5/16"	3/8"	3/16"	100	.15	5 bags
n/a	428035-1	White	3/8"	3/8"	3/16"	10	.01	5 bags
n/a	428035-2	White	3/8"	3/8"	3/16"	25	.04	5 bags
n/a	428035-4	White	3/8"	3/8"	3/16"	100	.17	5 bags
n/a	428037-1	White	1/2"	3/8"	3/16"	10	.02	5 bags
n/a	428037-2	White	1/2"	3/8"	3/16"	25	.05	5 bags
n/a	428037-4	White	1/2"	3/8"	3/16"	100	.18	5 bags
n/a	428059-1	White	5/8"	1/2"	3/16"	10	.03	5 bags
n/a	428059-2	White	5/8"	1/2"	3/16"	25	.08	5 bags
n/a	428059-4	White	5/8"	1/2"	3/16"	100	.30	5 bags
n/a	428061-1	White	3/4"	1/2"	3/16"	10	.03	5 bags
n/a	428061-2	White	3/4"	1/2"	3/16"	25	.09	5 bags
n/a	428061-4	White	3/4"	1/2"	3/16"	100	.37	5 bags
n/a	428065-1	White	1"	1/2"	3/16"	10	.04	5 bags
n/a	428065-2	White	1"	1/2"	3/16"	25	.11	5 bags
n/a	428065-4	White	1"	1/2"	3/16"	100	.44	5 bags
n/a	428073-1	White	1-1/2"	1/2"	3/16"	10	.07	5 bags
n/a	428073-2	White	1-1/2"	1/2"	3/16"	25	.19	5 bags
n/a	428073-4	White	1-1/2"	1/2"	3/16"	100	.73	5 bags
428232	428232-1	Black	3/16"	3/8"	3/16"	100/10	.12 / .01	5 bags
n/a	428232-2	Black	3/16"	3/8"	3/16"	25	.03	5 bags
n/a	428232-4	Black	3/16"	3/8"	3/16"	100	.12	5 bags
428233	428233-1	Black	1/4"	3/8"	3/16"	100/10	.12 / .01	5 bags
n/a	428233-2	Black	1/4"	3/8"	3/16"	25	.03	5 bags
n/a	428233-4	Black	1/4"	3/8"	3/16"	100	.12	5 bags
428234	428234-1	Black	5/16"	3/8"	3/16"	100/10	.15 / .01	5 bags
n/a	428234-2	Black	5/16"	3/8"	3/16"	25	.04	5 bags

CABLE CLAMPS CONTINUED

Bulk	Display	Color	A	B	C	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	428234-4	Black	5/16"	3/8"	3/16"	100	.15	5 bags
428235	428235-1	Black	3/8"	1/2"	3/16"	100/10	.17 / .01	5 bags
n/a	428235-2	Black	3/8"	1/2"	3/16"	25	.04	5 bags
n/a	428235-4	Black	3/8"	1/2"	3/16"	100	.17	5 bags
428237	428237-1	Black	1/2"	1/2"	3/16"	100/10	.19 / .02	5 bags
n/a	428237-2	Black	1/2"	1/2"	3/16"	25	.05	5 bags
n/a	428237-4	Black	1/2"	1/2"	3/16"	100	.19	5 bags
428259	428259-1	Black	5/8"	1/2"	3/16"	100/10	.30 / .03	5 bags
n/a	428259-2	Black	5/8"	1/2"	3/16"	25	.08	5 bags
n/a	428259-4	Black	5/8"	1/2"	3/16"	100	.30	5 bags
428261	428261-1	Black	3/4"	1/2"	3/16"	100/10	.37 / .03	5 bags
n/a	428261-2	Black	3/4"	1/2"	3/16"	25	.09	5 bags
n/a	428261-4	Black	3/4"	1/2"	3/16"	100	.37	5 bags
428265	428265-1	Black	1"	1/2"	3/16"	100/10	.44 / .04	5 bags
n/a	428265-2	Black	1"	1/2"	3/16"	25	.11	5 bags
n/a	428265-4	Black	1"	1/2"	3/16"	100	.44	5 bags
428273	428273-1	Black	1-1/2"	1/2"	3/16"	100/10	.73 / .07	5 bags
n/a	428273-2	Black	1-1/2"	1/2"	3/16"	25	.19	5 bags
n/a	428273-4	Black	1-1/2"	1/2"	3/16"	100	.73	5 bags

Cable Clamps are used to bundle and organize cable and wire runs, as well as simplify installation and maintenance. Temperature Rating: -40°F to 185°F. Flammability Rating: UL 94 V-2. Constructed of UV stabilized injection molded nylon.



HEAT SHRINK

Polyolefin

Sea-Dog Marine Wire™



Bulk	Display	Diameter	Length	Pieces	Color	Wt.(lb.)	Std. Pack
n/a	429600-1	1/4"	3"	3	Black	.03	10 sets
n/a	429601-1	1/4"	3"	3	Red	.03	10 sets
n/a	429602-1	1/4"	3"	3	Yellow	.03	10 sets
n/a	429603-1	1/4"	6"	10	Black	.06	10 sets
n/a	429604-1	1/4"	6"	10	Red	.06	10 sets
n/a	429605-1	1/4"	6"	10	Yellow	.06	10 sets
n/a	429606-1	1/4"	12"	10	Black	.09	10 sets
n/a	429607-1	1/4"	12"	10	Red	.09	10 sets
n/a	429608-1	1/4"	12"	10	Yellow	.09	10 sets
n/a	429609-1	1/4"	48"	1	Black	.36	10 sets
n/a	429610-1	1/4"	48"	1	Red	.36	10 sets
n/a	429611-1	1/4"	48"	1	Yellow	.36	10 sets
n/a	429620-1	3/8"	3"	3	Black	.04	10 sets
n/a	429621-1	3/8"	3"	3	Red	.04	10 sets
n/a	429622-1	3/8"	3"	3	Yellow	.04	10 sets
n/a	429623-1	3/8"	6"	5	Black	.08	10 sets
n/a	429624-1	3/8"	6"	5	Red	.08	10 sets
n/a	429625-1	3/8"	6"	5	Yellow	.08	10 sets
n/a	429626-1	3/8"	12"	5	Black	.16	10 sets
n/a	429627-1	3/8"	12"	5	Red	.16	10 sets
n/a	429628-1	3/8"	12"	5	Yellow	.16	10 sets
n/a	429629-1	3/8"	48"	1	Black	.40	10 sets
n/a	429630-1	3/8"	48"	1	Red	.40	10 sets
n/a	429631-1	3/8"	48"	1	Yellow	.40	10 sets
n/a	429632-1	3/8"	3"	2	Black/Red (Battery Combo)	.15	10 sets
n/a	429640-1	1/2"	3"	3	Black	.10	10 sets
n/a	429641-1	1/2"	3"	3	Red	.10	10 sets
n/a	429642-1	1/2"	3"	3	Yellow	.10	10 sets
n/a	429643-1	1/2"	6"	5	Black	.20	10 sets
n/a	429644-1	1/2"	6"	5	Red	.20	10 sets
n/a	429645-1	1/2"	6"	5	Yellow	.20	10 sets
n/a	429646-1	1/2"	12"	5	Black	.30	10 sets
n/a	429647-1	1/2"	12"	5	Red	.30	10 sets
n/a	429648-1	1/2"	12"	5	Yellow	.30	10 sets

HEAT SHRINK CONTINUED




Bulk	Display	Diameter	Length	Pieces	Color	Wt.(lb.)	Std. Pack
n/a	429649-1	1/2"	48"	1	Black	.48	10 sets
n/a	429650-1	1/2"	48"	1	Red	.48	10 sets
n/a	429651-1	1/2"	48"	1	Yellow	.48	10 sets
n/a	429660-1	3/4"	3"	3	Black	.25	10 sets
n/a	429661-1	3/4"	3"	3	Red	.25	10 sets
n/a	429662-1	3/4"	3"	3	Yellow	.25	10 sets
n/a	429663-1	3/4"	3"	2	Black/Red (Battery Combo)	.25	10 sets
n/a	429664-1	3/4"	6"	5	Black	.30	10 sets
n/a	429665-1	3/4"	6"	5	Red	.30	10 sets
n/a	429666-1	3/4"	6"	5	Yellow	.30	10 sets
n/a	429667-1	3/4"	12"	4	Black	.35	10 sets
n/a	429668-1	3/4"	12"	4	Red	.35	10 sets
n/a	429669-1	3/4"	12"	4	Yellow	.35	10 sets
n/a	429670-1	3/4"	48"	1	Black	.45	10 sets
n/a	429671-1	3/4"	48"	1	Red	.45	10 sets
n/a	429672-1	3/4"	48"	1	Yellow	.45	10 sets
n/a	429674-6	1/4"-3/4"	3"	30	Black/Red/Yellow (Contractors Box)	1.00	10 sets
n/a	429675-6	1/4"-3/4"	6"	30	Black/Red/Yellow (Contractors Box)	1.00	10 sets
n/a	429679-1	1/4" Write-On Labels	2-1/4"	10	Clear w/ White Writing Surface	.15	10 sets

Thin, 3 to 1 shrink ratio tubing provides insulation and abrasion protection for wires and cables. Flexible yet durable material resists most common oils, chemicals and fluids. Shrinks at 257F/125C. Operating temperature -45C to +125C. Color options for ABYC compliant systems. UL 224VW-1 Recognized.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SD-13 CIRCUIT BREAKER - RESET ONLY - SCREW TERMINAL

Stamped Brass/Molded Bakelite

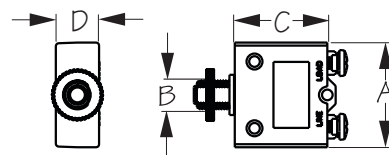


Bulk	Display	Amps	A	B	C	D	Button Color	Panel Depth	Wt.(lb.)	Std. Pack
830110	830110-1	3	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830111	830111-1	5	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830112	830112-1	7	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830113	830113-1	10	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830114	830114-1	15	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830115	830115-1	20	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830116	830116-1	25	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830117	830117-1	30	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830118	830118-1	40	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830901	830901-1	Breaker Boot Only							.01	10 ea

SD-13 Circuit Breakers are designed to protect an electrical circuit from damage caused by excess current. Unlike fuses, breakers have the advantage of being reset after tripping. Optional Breaker Boot (830901) provides additional protection in wet environments. Panel mounted, compact design. Screw Terminals: #8-32. Range: 3A-40A. Maximum Voltage: 250VAC/50VDC. Amperage Interrupt Capacity (AIC): 1kA, 250VAC, C1 and 0.3kA, 50VDC, C1 (UL 1077). Ignition Protected: UL1500 (per Title 33 Chapter I, Part 183, Subparts I and J, of the CFR). UL/cUL Recognized per UL 1077 (E66224)


⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Breaker Boot



SD-13 CIRCUIT BREAKER - RESET ONLY - QUICK CONNECT

Stamped Brass/Molded Bakelite

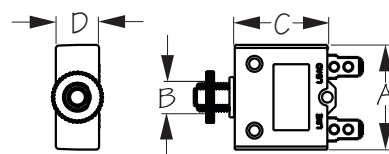


Bulk	Display	Amps	A	B	C	D	Button Color	Panel Depth	Wt.(lb.)	Std. Pack
830150	830150-1	3	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830151	830151-1	5	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830152	830152-1	7	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830153	830153-1	10	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830154	830154-1	15	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830155	830155-1	20	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830156	830156-1	25	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea

SD-13 CIRCUIT BREAKER - RESET ONLY - QUICK CONNECT CONTINUED


Bulk	Display	Amps	A	B	C	D	Button Color	Panel Depth	Wt.(lb.)	Std. Pack
830157	830157-1	30	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830158	830158-1	40	1-3/8"	7/16"	1-1/4"	9/16"	White	3/16"	.07	10 ea
830901	830901-1	Breaker Boot Only							.01	10 ea



Breaker with optional Breaker Boot

SD-13 Circuit Breakers are designed to protect an electrical circuit from damage caused by excess current. Unlike fuses, breakers have the advantage of being reset after tripping. Panel mounted compact design. Quick-Connect 1/4" Terminals. Optional Breaker Boot (830901) provides additional protection in wet environments. Range: 3A-40A. Maximum Voltage: 250VAC/50VDC. Amperage Interrupt Capacity (AIC): 1kA, 250VAC, C1 and 0.3kA, 50VDC, C1 (UL 1077). Ignition Protected: UL1500 (per Title 33 Chapter I, Part 183, Subparts I and J, of the CFR). UL/cUL Recognized per UL 1077 (E66224)

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

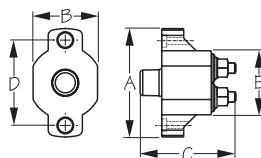**SD-18 CIRCUIT BREAKER - RESET ONLY - PANEL MOUNT**


Stainless Steel Studs & Washers/Thermoset Plastic



Bulk	Display	Amps	A	B	C	D	E	Volts	Wt.(lb.)	Std. Pack
830572	830572-1	15	2"	1-3/16"	1-3/8"	1-9/16"	1-3/16"	32	.15	10 ea / 5 ea
830573	830573-1	20	2"	1-3/16"	1-3/8"	1-9/16"	1-3/16"	32	.15	10 ea / 5 ea
830574	830574-1	30	2"	1-3/16"	1-3/8"	1-9/16"	1-3/16"	32	.15	10 ea / 5 ea
830575	830575-1	40	2"	1-3/16"	1-3/8"	1-9/16"	1-3/16"	32	.15	10 ea / 5 ea
830576	830576-1	50	2"	1-3/16"	1-3/8"	1-9/16"	1-3/16"	32	.15	10 ea / 5 ea
830577	830577-1	60	2"	1-3/16"	1-3/8"	1-9/16"	1-3/16"	32	.15	10 ea / 5 ea

SD-18 Circuit Breakers are designed to protect an electrical circuit from damage caused by excess current. Unlike fuses, breakers have the advantage of being reset after tripping. Rugged shock resistant design. Terminal Studs: #10-32. Range: 15A-60A. Maximum Voltage: 120VAC/32VDC. Amperage Interrupt Capacity (AIC): UL 1077 3000A (32VDC), SAE J553 Compliant. Ignition Protected: UL 1500 (per Title 33 CFR, Section 183.410(a)). Interrupt Capacity: SAE J553, *UL1077. Ingress Protection: SAE 1428. Made in the U.S.A.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

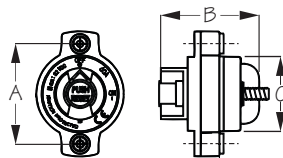**SD-53 BATTERY DISCONNECT W/ BREAKER**

Machined Brass/Injection Molded Nylon



Bulk	Display	A	B	C	Function	Volts	Amps	Stud Diameter	Wt.(lb.)	Std. Pack
830400	830400-1	2"	2"	1-1/2"	On/Off	32	30	1/4"	.09	10 ea / 5 ea
830401	830401-1	2"	2"	1-1/2"	On/Off	32	40	1/4"	.10	10 ea / 5 ea
830402	830402-1	2"	2"	1-1/2"	On/Off	32	50	1/4"	.12	10 ea / 5 ea
830403	830403-1	2"	2"	1-1/2"	On/Off	32	60	1/4"	.13	10 ea / 5 ea
830404	830404-1	2"	2"	1-1/2"	On/Off	32	70	1/4"	.14	10 ea / 5 ea
830905	830905-1	Standoff-Accessory							.02	10 ea / 5 ea

These Battery Disconnects with Breaker feature a small footprint which makes them ideal for close quarters. The combination of a rotary switch and breaker in a single product allows cost savings by eliminating the added components, material and labor of a separate battery switch and circuit breaker/fuse for accessory circuits. (Not rated for engine starter circuits). Terminal Studs: 1/4"-28. Range: 30A-70A. Maximum Voltage: 42VDC. Amperage Interrupt Capacity (AIC): 1.5kA/U3 @ 28VDC per ABYC (SAE J553 & UL1077*) and 3kA/U3 @ 14VDC per ABYC (SAE J553 & UL1077*). Ignition Protection: ISO 8846*, USCG, ABYC, UL1500* and SAE J1171. Interrupt Capacity: SAE J553, ABYC E-11, UL1077* Ingress Protection: IP67. Made in the U.S.A.



⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov


Battery Disconnect with optional Standoff Accessory





SD-32 CIRCUIT BREAKER - SHORT STOP - RESET ONLY

Stamped Brass/Injection Molded Nylon/Polycarbonate

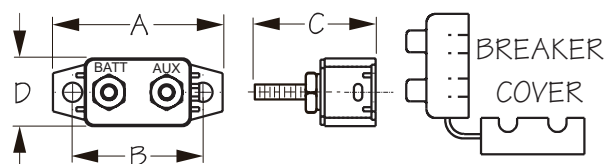

Bulk	Display	Amps	Volts	Cover Included	A	B	C	D	Wt.(lb.)	Std. Pack
830350	830350-1	10	12 or 24	Yes	2"	1-9/16"	1-1/16"	13/16"	.05	10 ea
830351	830351-1	15	12 or 24	Yes	2"	1-9/16"	1-1/16"	13/16"	.05	10 ea
830352	830352-1	20	12 or 24	Yes	2"	1-9/16"	1-1/16"	13/16"	.05	10 ea
830353	830353-1	25	12 or 24	Yes	2"	1-9/16"	1-1/16"	13/16"	.05	10 ea
830354	830354-1	30	12 or 24	Yes	2"	1-9/16"	1-1/16"	13/16"	.05	10 ea
830355	830355-1	40	12 or 24	Yes	2"	1-9/16"	1-1/16"	13/16"	.05	10 ea
830356	830356-1	50	12 or 24	Yes	2"	1-9/16"	1-1/16"	13/16"	.05	10 ea


These Resettable Circuit Breakers with manual reset button are for use with higher amperage accessories. These breakers are ignition protected and can be installed aboard gasoline powered boats. May be used on 12 VDC or 24 VDC systems. Terminal Studs: #10-32. Range: 10A-50A. Maximum Voltage: 28 VDC. Amperage Interrupt Capacity (AIC): 2500A @12 VDC. Ignition Protected: SAE Standard J553 & J1171. Ingress Protection: IP66

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SD-17 CIRCUIT BREAKER - PANEL MOUNT

Stainless Steel Studs & Washers/Thermoset Plastic

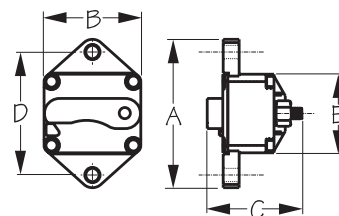

Bulk	Display	Amps	A	B	C	D	E	Volts	Wt.(lb.)	Std. Pack
830190	830190-1	25	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea
830191	830191-1	30	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea
830192	830192-1	40	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea
830193	830193-1	50	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea
830194	830194-1	60	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea
830195	830195-1	70	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea
830196	830196-1	80	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea
830197	830197-1	100	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea
830198	830198-1	120	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea
830199	830199-1	150	2-15/16"	1-15/16"	2-1/8"	2-7/16"	1-9/16"	48	.18	1 ea


These Hi-Amp Resettable Thermal Circuit Breakers provide a visible indication of tripped condition. Panel mounted, water resistant and sealed for engine compartment and bilge area applications. Terminal Studs: 1/4"-28. Range: 25A-150A. Maximum Voltage: 48 VDC. Amperage Interrupt Capacity (AIC): 3,000A @ 14VDC, 1,500A @ 48VDC per SAE J1625, ABYC-E11, UL1077*. Ignition Protected: SAE J1171. Ingress Protection: IP67. Made in the USA.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SD-17 CIRCUIT BREAKER - SURFACE MOUNT

Stainless Steel Studs & Washers/Thermoset Plastic

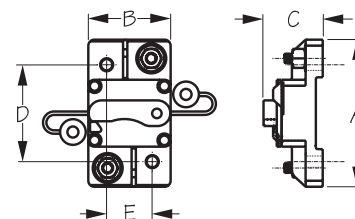


Bulk	Display	Amps	A	B	C	D	E	Volts	Wt.(lb.)	Std. Pack
830220	830220-1	25	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea
830221	830221-1	30	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea
830222	830222-1	40	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea
830223	830223-1	50	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea
830224	830224-1	60	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea
830225	830225-1	70	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea

SD-17 CIRCUIT BREAKER - SURFACE MOUNT CONTINUED

Bulk	Display	Amps	A	B	C	D	E	Volts	Wt.(lb.)	Std. Pack
830226	830226-1	80	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea
830227	830227-1	100	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea
830228	830228-1	120	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea
830229	830229-1	150	2-7/8"	1-7/8"	1-3/4"	2-3/16"	1-1/8"	48	.23	1 ea

These Hi-Amp Resettable Thermal Circuit Breakers provide a visible indication of tripped condition. Surface mounted, water resistant and sealed for engine compartment and bilge area applications. Terminal Studs: 1/4"-28. Range: 25A-150A. Maximum Voltage: 48 VDC. Amperage Interrupt Capacity (AIC): 3,000A @ 14VDC, 1,500A @ 48VDC per SAE J1625, ABYC-E11, UL1077*. Ignition Protected: SAE J1171. Ingress Protection: IP67. Made in the USA

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

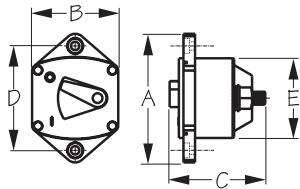**SD-87 CIRCUIT BREAKER - PANEL MOUNT**


Stainless Steel Studs & Washers/Thermoset Plastic



Bulk	Display	Amps	A	B	C	D	E	Volts	Wt.(lb.)	Std. Pack
830450	830450-1	25	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830451	830451-1	30	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830452	830452-1	40	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830453	830453-1	50	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830454	830454-1	60	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830455	830455-1	70	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830456	830456-1	80	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830457	830457-1	90	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830458	830458-1	100	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830459	830459-1	120	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830460	830460-1	135	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830461	830461-1	150	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea
830462	830462-1	200	3-3/8"	2-1/4"	2-9/16"	2-3/4"	2-1/8"	48	.18	1 ea

These Hi-Amp Resettable Circuit Breakers provide a visible indication of tripped condition. Panel mounted, water resistant and sealed for engine compartment and bilge area applications. Terminal Studs: 5/16"-18. Range: 25A-200A. Maximum Voltage: 48VDC. Amperage Interrupt Capacity (AIC): 5000A@14VDC, 3000A@28VDC, 1500A@48VDC per SAE J553, ABYC-E11, UL1077. Ignition Protected: SAE J1171. Ingress Protection: IP66. Made in the USA.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

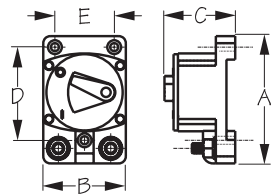**SD-87 CIRCUIT BREAKER - SURFACE MOUNT**

Stainless Steel Studs & Washers/Thermoset Plastic



Bulk	Display	Amps	A	B	C	D	E	Volts	Wt.(lb.)	Std. Pack
830520	830520-1	25	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830521	830521-1	30	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830522	830522-1	40	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830523	830523-1	50	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830524	830524-1	60	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830525	830525-1	70	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830526	830526-1	80	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830527	830527-1	90	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830528	830528-1	100	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830529	830529-1	120	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830530	830530-1	135	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830531	830531-1	150	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea
830532	830532-1	200	3-1/2"	2-1/4"	1-15/16"	2-9/16"	1-5/8"	48	.18	1 ea

These Hi-Amp Resettable Circuit Breakers provide a visible indication of tripped condition. Surface mounted, water resistant and sealed for engine compartment and bilge area applications. Terminal Studs: 5/16"-18. Range: 25A-200A. Maximum Voltage: 48VDC. Amperage Interrupt Capacity (AIC): 5000A@14VDC, 3000A@28VDC, 1500A@48VDC per SAE J553, ABYC-E11, UL1077. Ignition Protected: SAE J1171. Ingress Protection: IP66. Made in the USA.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



WIRE STRIPPER & CRIMPER

Powder Coated Steel

Bulk	Display	A	B	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429900-1	8-1/8"	2-9/16"	22-10	.40	1 ea

Wire Stripper & Crimper tool crimps and strips 22-10 gauge wire. Constructed of powder coated steel. A great addition to any tool box.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DELUXE WIRE STRIPPER & CRIMPER

Chrome Plated Steel

Bulk	Display	A	B	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429905-1	8-7/8"	3"	22-10	.50	1 ea

Deluxe Wire Stripper & Crimper tool is spring loaded and strips & crimps 22-10 gauge wire. Constructed of chrome plated steel. A great addition to any tool box.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MULTI-FUNCTION WIRE STRIPPER & CRIMPER

Powder Coated Steel

Bulk	Display	Length	Width	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429940-1	8"	4"	24-10	.61	1 ea

This professional grade Multi-Function Wire Stripper & Crimper tool is three tools in one. It strips, crimps, and cuts 24-10 gauge wire with ease. Constructed of powder coated steel. A great addition to any tool box!

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



TERMINAL CRIMPER

Powder Coated Steel

Bulk	Display	Length	Width	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429914-1	8-1/2"	2-5/8"	20-10	.44	1 ea

Terminal Crimper tool crimps and strips 20-10 gauge wire. Constructed of powder coated steel. A great addition to any tool box.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



RACHETING CRIMPER

Powder Coated Steel

Bulk	Display	Length	Width	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429917-1	8-1/4"	2-1/2"	20-10	1.28	1 ea

Racheting Crimper tool crimps 20-10 gauge wire. Constructed of powder coated steel. A great addition to any tool box.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



PREMIUM HEAT SHRINK CRIMPER

Powder Coated PVC/Stainless Steel

Bulk	Display	Length	Width	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429920-1	9"	2-3/16"	22-10	.77	1 ea

Premium Heat Shrink Crimper tool is designed for use with heat shrink terminals. This high end, single ratchet crimper, crimps wire from 22-10 gauge. Ratchet action ensures correct crimping pressure. Constructed of powder coated PVC and stainless steel. A great addition to any tool box.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



HEAVY DUTY CRIMPER

Powder Coated Steel

Bulk	Display	Length	Width	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429924-1	15-1/4"	5-1/4"	Up To 4/0	2.37	1 ea

Heavy Duty Crimper tool crimps up to 4/0 gauge wire. Constructed of powder coated steel. A great addition to any tool box.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADJUSTABLE WIRE STRIPPER & CUTTER

Powder Coated Steel

Bulk	Display	Length	Width	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429930-1	6-3/4"	3-3/8"	24-10	.56	1 ea

This professional grade Adjustable Wire Stripper & Cutter tool is two tools in one. Self-adjusting and easy to use, it strips or cuts 24-10 gauge wire with ease. Constructed of powder coated steel. A great addition to any tool box.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



WIRE CUTTER

Powder Coated Steel

Bulk	Display	Length	Width	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429931-1	9-5/16"	2-11/16"	Up To 8	.92	1 ea

Wire Cutter tool cuts up to 8 gauge wire. Constructed of powder coated steel. A great addition to any tool box.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



HEAVY DUTY WIRE CUTTER

Powder Coated Steel

Bulk	Display	Length	Width	Wire Gauge	Wt.(lb.)	Std. Pack
n/a	429933-1	14"	3-1/8"	Up To 4/0	1.20	1 ea

Heavy Duty Wire Cutter tool cuts up to 4/0 gauge wire. Constructed of powder coated steel. A great addition to any tool box.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



NMEA Starter Kits

Available now!

Kickstart your NMEA project with ease!
Our new Starter Kits have everything
you need, all in one box.

820061-3
NMEA 2000 Single Starter Kit



NMEA 2000 MARINE CONNECTORS, CABLES & ACCESSORIES

Injection Molded Nylon

Bulk	Display	Description	Wt.(lb.)	Std. Pack
n/a	820061-3	NMEA 2000 Single Starter Kit	1.70	1 ea
n/a	820062-3	NMEA 2000 Dual Starter Kit	1.80	1 ea
n/a	820063-3	NMEA 2000 Single w/Backbone Starter Kit	2.00	1 ea

NMEA 2000 Marine Connectors, Cables & Accessories, T and Elbow connectors from 1 to 6 ports. Backbone cables 1.6' to 32', Drop Cables 1.6' to 16', Rear Mount Cable, T Connector Cables, Power Isolator, various caps and Bulkhead adapters.

⚠️ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov





PO Box 479
Everett, WA 98206
425-259-0194
425-339-1345
Sea-Dog.com

★★★ PRINTED IN THE USA ★★★

