## Sea-Dog Battery Test Switch w/ Gauge & Horn Button #422510-1 Installation Instructions

FGÁKUŠVÁ UBŮMÁ FEDÄKÁ ÍFEDÄ HÁŠŠMT OPCEVOPŐÁVY OVŐPÓÚÁ HÁÁT, 1°ÁT OBYOT WT ÁÚÖÜÁJƏ; ^|Á FEÁT, 1°ÁT OBYOT WT ÁÚÖÜÁÖJA8 JAÁ

HĐÁĆ[}}^80Á@Á[•āā;^Á¸ā^Á;-Á\*æ&@Ás¸āā;āā`æjÁsā&`āó£Á@ÁGÁ]æá^Á;}Á@Æ{;;^•][}åā;\*Á[&\^iÁ; ā&@Á;Aó@Ás;)Ác@Ás;æj^|È

ÎÈÁÔ[}}^8œÁ^{ æaājāj\*Áœ\{ājæ4Á;}Á@{¦}Ásǔœ[}Áq[Áj[•ãcāç^Áœ\{ājæ4Á;-Á@{¦}È

Ï BÁĴācÁ\*•^•Ásh^Á\*]]|a\*åÁ¸āc@Á[";ÁĴv>æBÖ[\*Ájæ)^|MKÇDÓHOBÁÇDÁĬ CBÁse)åÁÇDÓK=COBÁV@Á\*•^•Á@("|àÁs^Á•^åÁs^]^}àāj\*Á;}Áæ&@ÁsjāāïæsjāāïæsjĀsāšïāÁ |[æsbÁjāc@K;æcsā["{Áæsāj\*Á;ÁF€ÁDE[]•È

ì ĐÁV[Á^{ [ç^Áx@^Á\*•^Á@]|å^¦Á&æ]ĐÃ^^ÁØà\*¦^Áæ\*|[, K

Þ[ơ MÁN ĐÁ, ^ơ/Ásaa) Ás^Ásaāb • ơ ả Ás^Ár^Ár{ [çã\*Ás@Ásaā /Ás} Ás@Ásaas Ása) å ¼ [çã\*Ás@Ár^A å/Ásaá Koð Ásr Ár Ás@Ár á Ásaá FŒÌÁş[|ơ EÁ

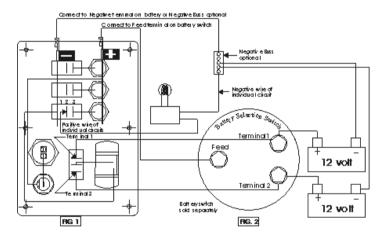




FIG. 3

"PUSH " indicates slot in the fuse holder body

A - 6-1/2


B-4-1/21



Insert a ball point pen or small screwdriver in the start. Press faward fuse holder. CAUTION: FUSE POPS UP. Cover fuse cap with hand or finger. NOTE: <u>Do not on up. the fuse holder.</u> You will break the fuse holder backet.



Cap pops out. Insert or remove fuse, then snap cap back to position.



C - 5-1/2

D - 3-1/2"

Replacement Red Insert for Fuse Holder Replacement Square Fuse Holder Replacement Rocker Switch Replacement Round Fuse Holder