


Sea-Dog Radar Reflector
Model Number 583422, 583426
Installation And Assembly Instructions
Read these instructions completely before starting assembly or installation

The radar reflector is made of aluminum construction with black plastic clips, easily assembled and folds flat when not in use for easy stowage. Each one includes two each of the square and triangular plates and six permanent mounting plastic clips.

Assembly:

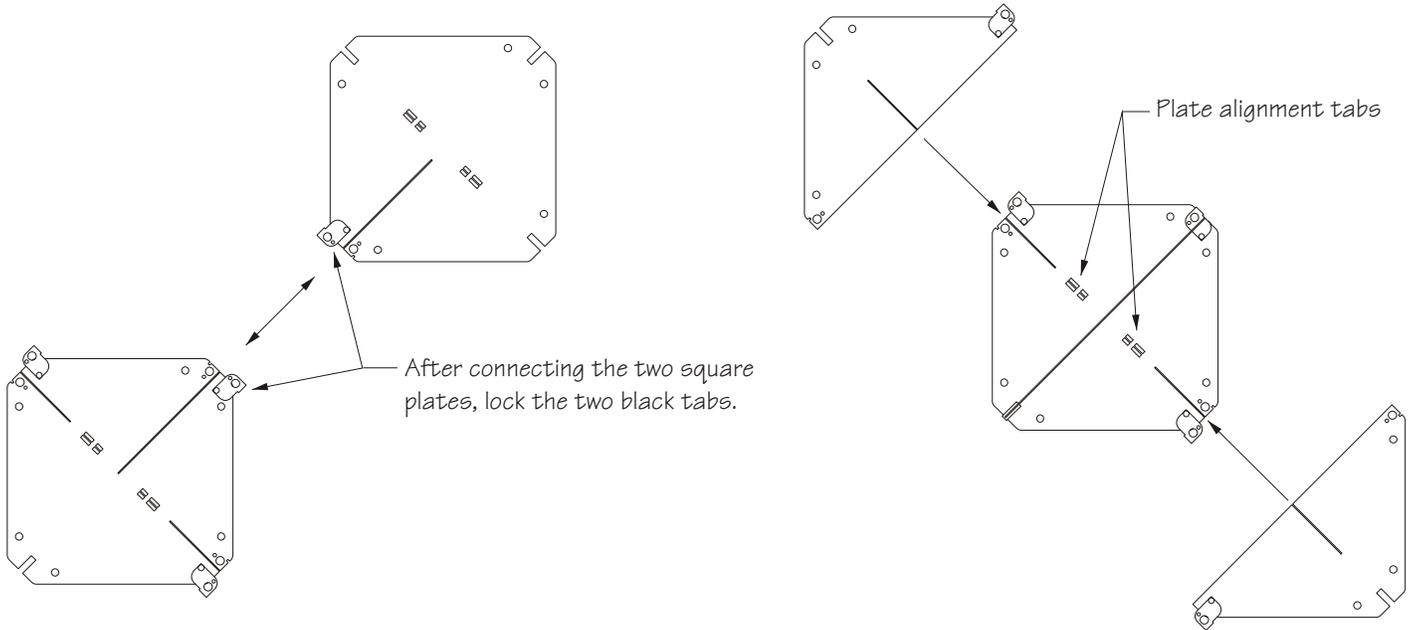

Step One:

Connect the two square plates, aligning the slots as shown. The two plates will create two planes that are perpendicular and that pass through each other. Two of the corners will be complete and you will be able to snap the black plastic corner connectors down and lock them into place.



Note: for disassembly, repeat above instructions in reverse order.

Step Two:

Align the slots on the triangular pieces with the two square pieces as shown. Be sure that the triangular plates fit in between the plate alignment tabs so that they sit perpendicular to all surfaces. Once both triangular plates are positioned correctly, the 4 remaining black corner connectors can be snapped into place.

Installation:

Hang the radar reflector at least 3 meters above the float level. Make sure the radar reflector hangs as plumb as possible. Try to leave the radar reflector obstruction free.

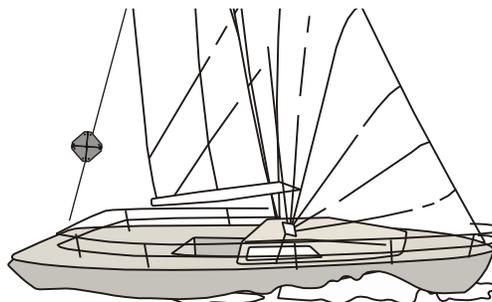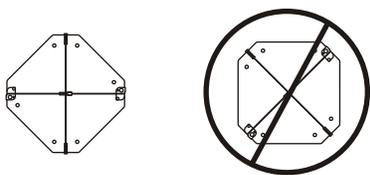

#D583422, #D583426